

140_L
Capacity

56_{Kg}
Nominal load

200 / 250_{mm}
Wheels diameter



FEATURES

The body and lid are injection moulded in solid coloured high-density polyethylene.

Manufactured using environmentally-friendly recyclable materials.

No heavy metals in the pigments.

Ideal for different types of waste collection: paper and cardboard, glass, packaging, organic matter, etc. ...

Available in a wide range of colours..

DIN or AFNOR standard lifting systems.

Customisation of lid with thermal transfer graphic, area: 230 x 45 mm.

Customisation of lid with an embossed logo, area: 340 x 220 mm.


Customisation of body with silk screen or thermal transfer graphic, area: 280 x 290 mm.

CE Marking with sound power level indicated in accordance with European Directive 2000/14/EC. 81,7 db.

UN certificate for the transportation of hazardous goods.

Product Approval Certificate awarded by TÜV Product Service GmbH in accordance with European Standard EN 840.

STANDARDS

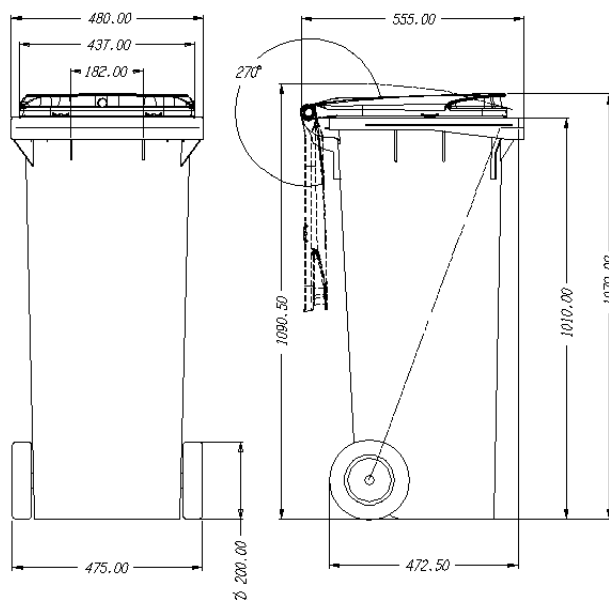

These dimensions are subject to the tolerances given in EN 840-1:2012.

F100281Z / 27-2-13 / Rev 0.0


ATTRIBUTES



QUALITY




ERGONOMICS



FUNCTIONALITY

ACCESSORIES



GLASS APERTURE



PLASTIC APERTURE



PAPER APERTURE



SIDE HANDLE



CUSTOMISATION



CUSTOMISATION



PEDAL



AVAILABLE IN A WIDE RANGE OF COLOURS

EQUIPMENT


200 mm diameter wheels.

Openings with sizes and features specially designed to accommodate each type of waste, making them easy to use.


Integrated sound-proofing system in the lid.

Recess for electronic chips.


Can be equipped with a range of accessories providing real solutions to every requirement: pedal-operated lid opening, reflective strips, lock, side handle.



Electronic Chip



Sound-proofing




Easy to stack



Lock



Customisation



Reflective strips